

DUMPSBOSS.COM

Alcatel-Lucent Advanced Troubleshooting

Alcatel-Lucent 4A0-110

Version Demo

Total Demo Questions: 5

Total Premium Questions: 42

Buy Premium PDF


<https://dumpsboss.com>

support@dumpsboss.com

dumpsboss.com

QUESTION NO: 1

Refer to the diagram below, what encapsulation type and VLAN tag are required at point X for the PC to ping the IES interface?

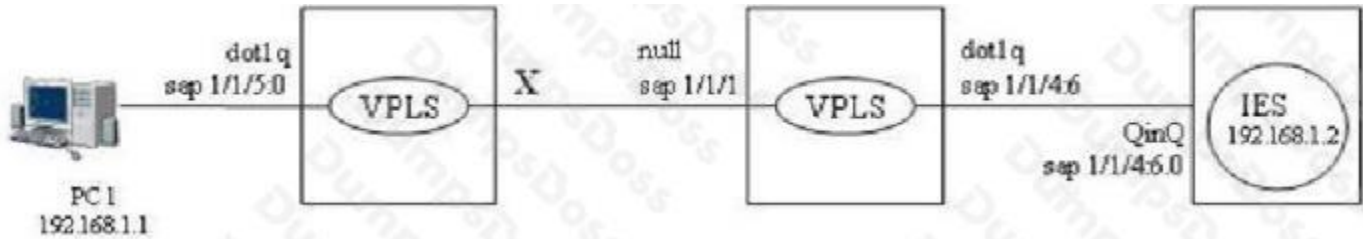

- A. qinq sap 1/1/1:6.0
- B. qinq sap 1/1/1:6.*
- C. dot1q sap 1/1/1:6
- D. null sap 1/1/1
- E. There is no way to make ping works in this case

ANSWER: D**QUESTION NO: 2**

Which of the following debug statements can be used to troubleshoot if the OSPF adjacency is staying at xstart state? Select two answers.

- A. Debug router ospf rtm
- B. Debug router ospf packet dbdescr
- C. Debug router ospf neighbor
- D. Debug router ospf packet hello
- E. Debug router ospf spf

ANSWER: B C**QUESTION NO: 3**

Two direct connected routers are running RIPv2, neighbors are up but there is no route in the RIP database. Review the configuration information below. What is the potential problem?

Node 1

```
router rip
group "test"
  neighbor "toPod2"
exit
exit
```

Node 2

```
router rip
group "test"
  neighbor "toPod1"
exit
exit
```

- A. System interface is not added to the RIP protocol
- B. No import policy is configured
- C. No export policy is configured
- D. Split-horizon has to be disabled in RIP
- E. Message-size has to be configured with a non-zero value

ANSWER: C

QUESTION NO: 4

A LSP is configured with one primary path and one secondary path as below. What configuration is required to make the LSP non-revertive. Choose the best answer.

```
config>router>mpls>
  path "toRouter3-loose"
    no shutdown
  path "toRouter3-backup"
    hop 1 10.10.1.2 loose
    no shutdown
  lsp toRouter3
    to 10.10.1.3
    cspf
    primary "toRouter3-loose"
      bandwidth 600
    secondary "toRouter3-backup"
      standby
      bandwidth 600
      no shutdown
```

- A. Turn off CSPF and remove all the bandwidth reservations
- B. Remove the primary path and configure both paths as secondary
- C. Under asp toRouter3? configure on-revertive
- D. It is not possible to configure the LSP as non-revertive

E. MPLS fast re-route has to be enabled to make it non-revertive

ANSWER: B

QUESTION NO: 5

Which files have to exist on Compact Flash 3 during system initialization on the Alcatel 7x50?

- A. iom.tim
- B. boot.ldr
- C. cpm.tim
- D. config.cfg
- E. bof.cfg

ANSWER: B E