

DUMPSBOSS.COM

NetApp Certified Support Engineer

Netapp NS0-194

Version Demo

Total Demo Questions: 10

Total Premium Questions: 62

Buy Premium PDF

<https://dumpsboss.com>

support@dumpsboss.com

dumpsboss.com

QUESTION NO: 1

A customer ordered a FAS2720 cluster with 8 TB SATA drives. The customer wants to use the Advanced Drive Partitioning (ADP) feature to avoid consuming the high capacity drives for the root aggregate. Before you use the cluster setup, you issue the aggr status command and notice that ADP is not being used.

In this scenario, what would you use to implement ADP?

- A. loader prompt
- B. special boot menu
- C. nodeshell
- D. SP prompt

ANSWER: A**QUESTION NO: 2**

You are asked to replicate 15 of 20 volumes and the network configuration of your storage virtual machine to your other data center.

In this scenario, which NetApp technology should you use?

- A. SnapMirror Synchronous
- B. SVM DR
- C. MetroCluster
- D. SVM peering

ANSWER: A

Explanation:

Reference: <https://www.netapp.com/pdf.html?item=/media/19369-tr-4832.pdf>

QUESTION NO: 3

Which three techniques are used in ONTAP to improve storage efficiencies? (Choose three.)

- A. compression
- B. encryption

- C. compaction
- D. ADP
- E. thin provisioning

ANSWER: A C E

Explanation:

Reference: <https://cloud.netapp.com/blog/storage-efficiency-success-stories-with-cloud-volumes-ontap>


QUESTION NO: 4

What are two conditions that would cause writes in memory to be written to disk? (Choose two.)

- A. The NVRAM (NVLog) fills up.
- B. A user presses "Save".
- C. Drive capacity becomes available.
- D. A Snapshot copy is taken.

ANSWER: A B

QUESTION NO: 5

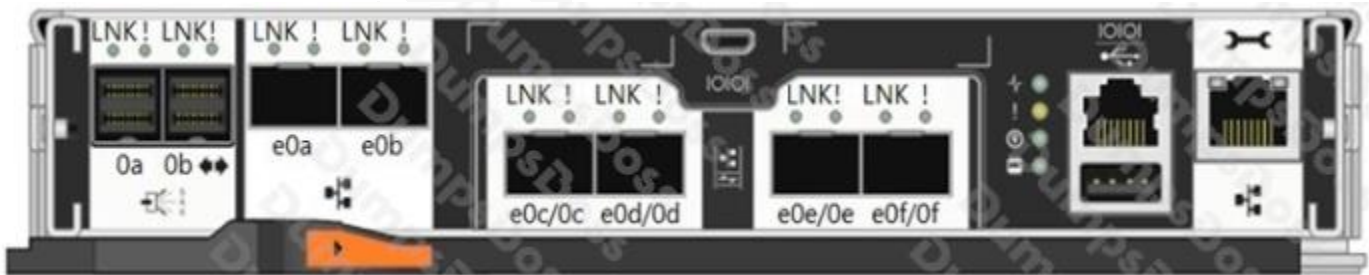

In the AFF A200 shown in the exhibit, which port is a CNA port?

- A. |0|0|
- B. e0c/0c
- C. e0a
- D. 0a

ANSWER: B**Explanation:**

Reference: <https://docs.netapp.com/platstor/topic/com.netapp.doc.hw-2700-install-setup/GUID-FE4BD3C8-3DB4-438A-A5CE-FEEF74AE8BAF.html>

QUESTION NO: 6

In ONTAP 9.5, the event log show command queries and displays entries from which file?

- A. messages.log
- B. ems.log
- C. bcomd.log
- D. mgwd.log

ANSWER: B**Explanation:**

Reference: https://docs.netapp.com/ontap-9/index.jsp?topic=%2Fcom.netapp.doc.dot-cm-cmpr-930%2Fevent__log__show.html

QUESTION NO: 7

You are using FCP and iSCSI protocols from your clients with ONTAP as the target. You want to ensure that storage failover (SFO) works correctly for your clients.

In this scenario, which two features on the initiator and the target will accomplish this task? (Choose two.)

- A. LACP
- B. MPIO
- C. ALUA
- D. SCSI

ANSWER: B C**Explanation:**

Reference: <https://www.netapp.com/media/10680-tr4080.pdf>

QUESTION NO: 8

You are using AFF storage with the NVMe storage protocol on your Linux clients.

In this scenario, which NVMe feature must be present and enabled for the client to see storage failover happen?

- A. Asymmetric Namespace Access (ANA)
- B. Multi-Path I/O (MPIO)
- C. Asymmetric Logical Unit Access (ALUA)
- D. NVMe Qualified Name (NQN)

ANSWER: B

QUESTION NO: 9

You observe cyclic redundancy check (CRC) errors on a network port from a node in the cluster.

Which two components would you consider reseating or replacing before you perform actions on the physical port where the errors are reported from the node? (Choose two.)

- A. SFP
- B. cluster interconnect switch
- C. up-stream switch
- D. cable

ANSWER: C D

QUESTION NO: 10

What are two supported cabling methods for a NetApp HCI compute node? (Choose two.)

- A. 1-cable configuration
- B. 2-cable configuration
- C. 6-cable configuration
- D. 4-cable configuration

ANSWER: B C

Explanation:

Reference: https://library.netapp.com/ecm/ecm_download_file/ECMLP2856899 (11)

DUMPSBOSS.COM