



MuleSoft Certified Developer - Level 1 (Mule 4) (MCD-Level-1)

Mulesoft MuleSoft-Certified-Developer-Level-1

Version Demo

Total Demo Questions: 10

Total Premium Questions: 118

Buy Premium PDF

<https://dumpsboss.com>

support@dumpsboss.com

dumpsboss.com

QUESTION NO: 1

According to Semantic Versioning, which version would you change for incompatible API changes?

- A. MINOR
- B. PATCH
- C. MAJOR
- D. No change

ANSWER: C**QUESTION NO: 2**

A Mule application contains a global error handler configured to catch any errors.

Where must the global error handler be specified so that the global error handler catches all errors from flows without their own error handlers?

- A. A global element
- B. The pom.xml file
- C. Nowhere, the global error handler is automatically used
- D. A configuration properties file

ANSWER: D**Explanation:**

Reference: <https://dzone.com/articles/error-handling-in-mule-1>

QUESTION NO: 3

Refer to the exhibits.

The screenshot shows a web client interface for a REST API. On the left, the API definition for the ACME Order API is shown in RAML 1.0 format. The endpoint is `/order:` with a `post:` method. The request body is defined as `application/xml:` with an example XML payload. The right side of the interface shows the configuration for a POST request to `http://localhost:8081/api/order`. The 'Body' tab is selected, showing the 'Body content type' as `multipart/mixed` and the 'Editor view' as `Raw input`. The request has failed with a `415 Unsupported Media Type` error, and the response body is `{ "message": "Unsupported media type" }`.

```
#%RAML 1.0
title: ACME Order API
version: 1.0

/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
          </customerName>
            <itemName>Electric Standing Desk
          </itemName>
            <cost>300.00</cost>
          </order>
```

The web client sends a POST request to the ACME Order API with an XML payload. An error is returned.

What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of application/octet-stream
- B. Set a request header with the name Content-Type to a value of application/xml
- C. Set a response header with the name Content-Type to a value of application/xml
- D. Set a response header with the name Content-Type to a value of application/octet-stream


ANSWER: A

Explanation:

Reference: <https://docs.mulesoft.com/mule-runtime/3.9/http-request-connector>

QUESTION NO: 4

Refer to the exhibits.

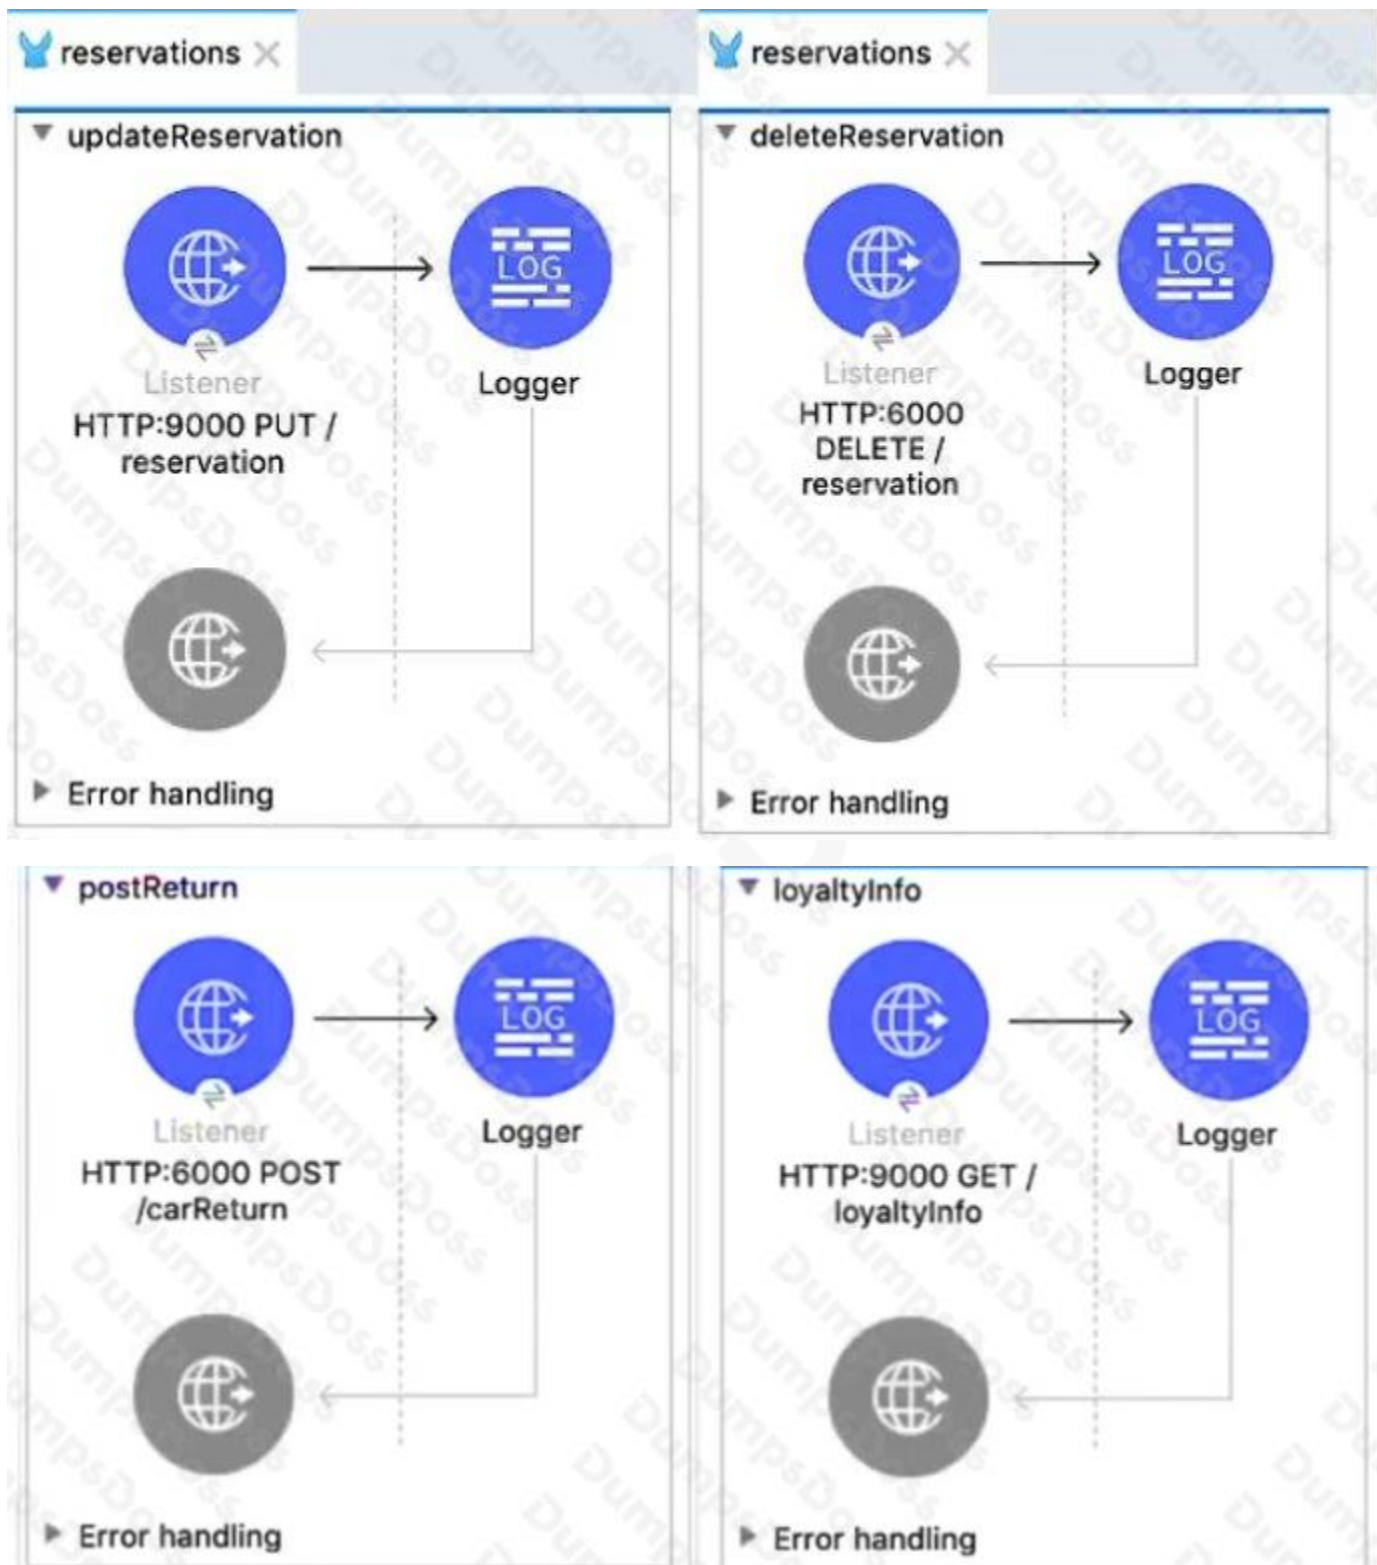

The Mule application has multiple HTTP Listeners contained in various configuration XML files. Each HTTP Listener is configured with the same host and with the port number, path, and operation shown in its display name.

What is the minimum number of global elements that must be defined to support all these HTTP Listeners?

- A. 1
- B. 2
- C. 3
- D. 4

ANSWER: D

Explanation:

Reference: <https://docs.mulesoft.com/mule-runtime/3.7/http-listener-connector>

QUESTION NO: 5

What is the object type returned by the File List operation?

- A. Object of String file names
- B. Array of String file names
- C. Object of Mule event objects
- D. Array of Mule event objects

ANSWER: D

QUESTION NO: 6


What is a core characteristic of the Modern API?

- A. API is rapidly prototyped following AGILE methodology.
- B. API follows the RESTful architecture.
- C. API is designed first using an API specification for rapid feedback.
- D. API has a mechanism to accept feedback and suggestions for improvement.

ANSWER: C

QUESTION NO: 7

Refer to the exhibit.

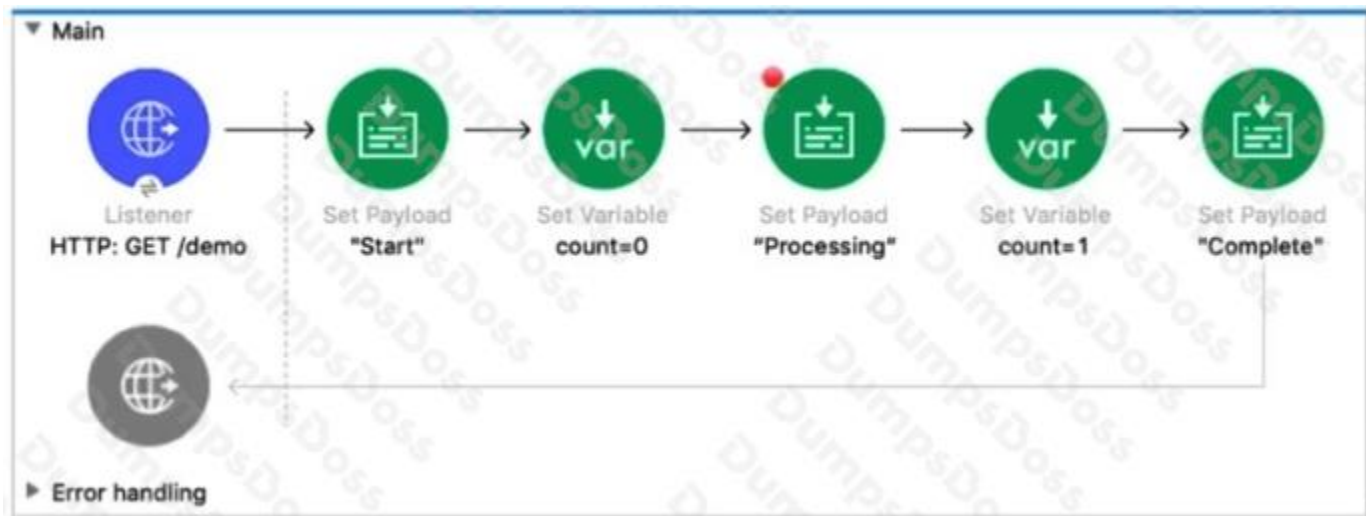

The Mule application is debugged in Anypoint Studio and stops at the breakpoint.

What is the value of the payload displayed in the debugger at this breakpoint?

- A. 0
- B. "Processing"
- C. "Start"
- D. "Complete"

ANSWER: D

QUESTION NO: 8

What module and operation will throw an error if a Mule event's payload is not a number?

- A. Validation module's Is number operation
- B. Filter module's Is number operation
- C. None of these
- D. Validation module's Is not a number operation

ANSWER: A

QUESTION NO: 9

A Set Variable component saves the current payload to a variable.

What is the DataWeave parent expression to access the variable?

- A. #[value]
- B. #[vars]
- C. #[var]
- D. #[values]

ANSWER: B

QUESTION NO: 10

How many Mule applications can run on a CloudHub worker?

- A. At most one
- B. None of these
- C. Depends
- D. At least one

ANSWER: A